

# IMPLEMENTS

FOR FRONT LOADERS, TELEHANDLERS  
AND WHEEL LOADERS



FRONT LOADERS



WHEEL LOADERS



TELEHANDLERS



YARD LOADERS



SKIDSTEERS



# THE RIGHT IMPLEMENT FOR ANY TASK

It is quite simple, really. If you use our original implements you will never have to have the second best when it comes to joy of work and profitability. You see and you sense that you always have the right implement for the job. Your jobs are always done with the maximum efficiency. Thanks to our superior quality, the fun of using our implements will last a long time – and so will the benefits. In short, choose the original and maximise your machine.



FRONT LOADERS



WHEEL LOADERS



TELEHANDLERS



YARD LOADERS



SKIDSTEERS

## CONTENTS

Latest additions	4-5	<b>BUCKETS</b>	19-31	<b>LIFTING IMPLEMENTS</b>	33-37
Q-companion/SelectoFix	6	Buckets for all needs		Pallet Fork XL	
<b>MANURE AND SILAGE IMPLEMENTS</b>	7-12	The right bucket		Pallet Fork	
Silocut XL		XV		Log Grab Attachment	
Silocut SG		HDXL		Bale Spike Attachment	
Multibenne XL		HDX		Hydraulic Pallet Fork	
Multibenne		HDXV		Stone Fork XL	
Powergrab XL		HD		Stone Fork	
Powergrab S		HXV		Big Bag Lifter	
Silograb XL		HV		<b>ACCESSORIES</b>	38-39
Silograb		H/HT		3-point Linkage	
Manure Fork XL		LV		Counter-weight	
Manure Fork		L		Q-Block	
<b>BALE HANDLING</b>	13-18	CE		<b>THE SUPPORT</b>	40
Quadrogrip		MPB/MPU		<b>HOOKS SYSTEMS</b>	41-42
Flexigrip		XH Bucket			
Unigrip		Special Clearing Bucket			
Topgrip		Grading Bucket XL			
Flexibal		Grading Bucket			
Silosplit		Precision Bucket			
Bale Spike MK II					
Square Bale Fork – Standard					
Square Bale Fork – Safety					

# LATEST ADDITIONS TO OUR IMPLEMENT FAMILY

Big gets bigger when we are launching new implements. This year, no less than eleven new XL implements will see the light of day. They have been developed to meet the increasing demands from the market and to add further depth to our already big implements portfolio.

The new implements include: Pallet Fork XL, Silograb XL, Manure Fork XL, HDXL Bucket, HXV Bucket, XV Bucket, HDX Bucket, Multibenne XL, Powergrab XL, Stone Fork XL and Grading Bucket XL.

Silocut XL

8




Multibenne XL

9



Powergrab XL

10

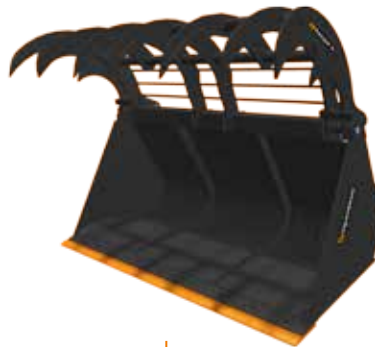

Silograb XL

11



Manure Fork XL

12



WE THINK BIGGER



xv | 22



HDXL | 22



HDX | 23



Grading Bucket XL | 30




Pallet Fork XL | 34



Stone Fork XL | 36



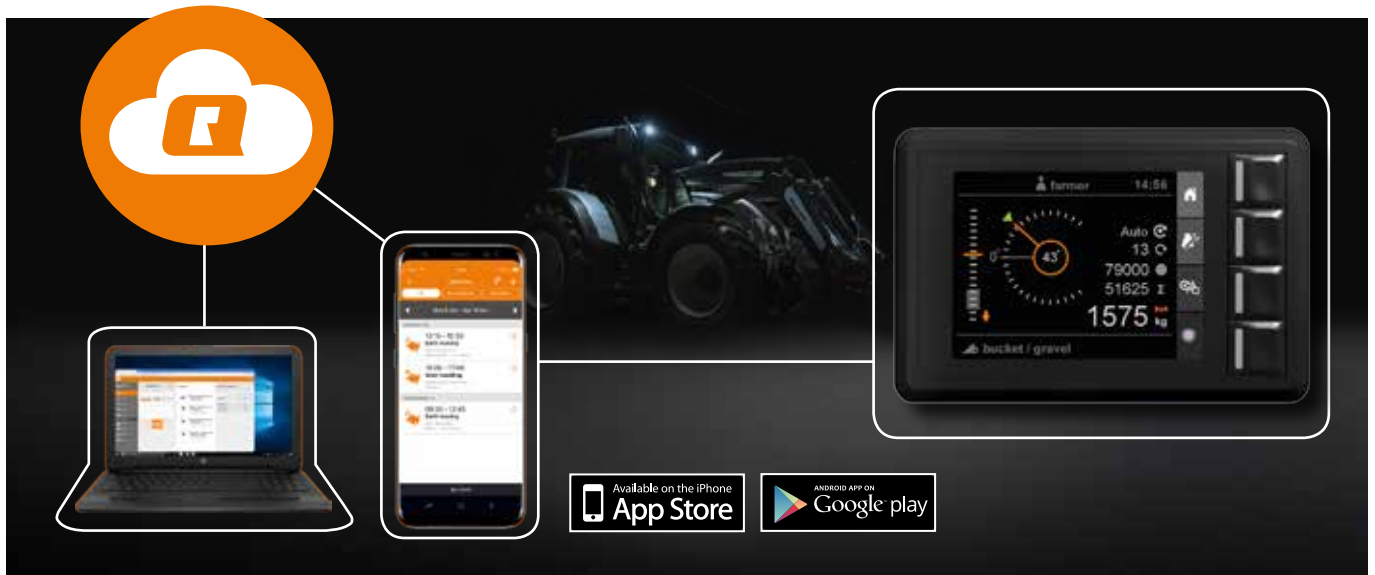

# THE FUTURE IS HERE IT'S CALLED Q-COMPANION®

The Q-series introduces a digital platform into the world of loaders: Q-companion®. An all-in-one digital solution for effective and safe front loader operation.

Use Q-companion to load the right amount of material, avoid over-loading of trailers and save unnecessary trips to the feed pit. Weigh your bales and count them automatically.

Know how much material is stored and where on the farm it is stored, thanks to the app. A clever maintenance reminder is also included to aid in taking good care of your loader.

NOTE! Only adapted for Q-series loaders.

## THE MAIN FUNCTIONS

**Position monitoring.** Once you've calibrated your implements, there's no longer any need to go out and adjust the angle indicator rod on the loader, use Q-companion instead! The implement position is displayed in relation to the ground for both height and angle. Functions that will increase your precision and safety.

**Load weighing.** Q-companion weighs the load during the lift with fantastic accuracy and provides guidance that helps you lift correctly for best results. Let Q-companion keep track of your work for you.

**Maintenance reminder.** Two individual maintenance indicators will tell you when it's time to lubricate and time for hardware torque checks. The time between maintenance is based on actual loader usage, not tractor usage. Loader maintenance is often forgotten and can result in down-time and repairs. Follow the maintenance schedule for trouble-free operation for years to come!

**App and Cloud Service.** Q-companion includes a free-of-charge smartphone app for iOS and Android, just search for Q-companion in the app stores. Using Bluetooth® technology, you can easily export weighing results from the Q-companion display to the cloud service and later access it on your computer or tablet.

**In the forefront.** Farming is changing, and with Q-companion you'll be in the forefront. By integrating state of the art sensor technology on to our loader's, the new Q-series is prepared for the future. Your efficiency is our guideline, and we guarantee you'll work smarter knowing your implement position, loaded weight and maintenance status just by looking at the color display.

## SAVE TIME

SelectoFix is a great time saving option if the front loader has a third or a fourth service. With a simple movement, the implement hoses are coupled, easily and without any problems, even when the system is pressurised. Your work continues within seconds. The connections are easy to clean, reducing the risk of dirt finding its way into the tractor's hydraulic system.



# MANURE & SILAGE IMPLEMENTS

Innovative silage implements that make you work more effectively and reduces handling time.



FRONT LOADERS



WHEEL LOADERS



TELEHANDLERS



YARD LOADERS



SKIDSTEERS



## Silocut XL

**FOR CUTTING SILAGE USING HEAVIER MACHINES**

The Silocut XL is used for cutting silage blocks from silage pockets. It features welded tine sleeves, bolted front knives, two hydraulic cylinders and has an optional push out mechanism. The larger 80X80 XL bolt on interface is used, compatible with hooks for different material handlers. The hardened cutting knives on the front edge and sides of the implement enables a very clean cut surface in the silage.

The clean cut then prevents the admission of air and generation of heat, critical for feed quality, while consuming less silage by reducing waste. Manageable cut blocks can also be transported in compressed form reducing handling time. Fits telehandlers and wheel loaders as well as front loaders.



HOOK SYSTEM: 80X80XL

SILOCUT XL	BACK W FORGED TINES		BACK W PROFILED TINES		BUCKET	
	225	250	225	250	225	250
Weight W/O hooks, kg	1285	1360	1390	1475	1390	1475
Depth, cm	142	142	142	142	142	142
Height closed, cm	139	139	139	139	139	139
Opening height, cm	125	125	128	128	125	125
Volume, m <sup>3</sup>	2.40	2.70	2.40	2.70	2.40	2.70
Width, cm	235	260	235	260	235	260



### 80x80XL HOOK SYSTEM

The 80x80 XL hook system was developed to accommodate the heavier implements. The first implement compatible with this system is the Silocut XL.





## Silocut® SG MKII

The Silocut features welded tine sleeves, bolted front knives, conus 3 tines in the outer corners and upgrades that improve serviceability. The MKII version of Silocut features upgraded knife support for improved grass cutting and larger 80X80 bolt on interface compatible with hooks for different material handlers.



### KNIVES FOR SILOCUT

Sharp knives are key to high efficiency when working with silage. By having a clean cut, it prevents the admission of air and generation of heat, critical for feed quality. Should the knives lose their sharpness, they are – like every other part, big or small – easy to replace.



HOOK SYSTEM: 80X80



SILOCUT SGMKII	125	150	175	200	225
Weight, kg	436	478	524	669	710
Max block volume, m <sup>3</sup>	0.8	0.95	1.1	1.25	1.4
Max pressure, BAR	210	210	210	250	250
Max opening, cm	77	77	77	77	77
No. of cylinders	2	2	2	3	3
Cylinder sizes	90/40	100/50	110/50	100/50 (x2) 90/40 (x1)	100/50
Working width, cm	125	150	175	200	225
Total width, cm	135	160	185	210	235



## Multibenne XL

### FOR ALLROUND GRABBING AND SCOOPING

Multibenne XL is a high volume implement suited to users who wish to fill the operating potential of their machines with up to 4 ton capacity. The Multibenne XL is a perfect all-rounder implement that is flexible with bolt on side plates that can be removed depending on the season or use of the machine in different environments.

The bucket part of the implement is perfect for handling loose feed as this is completely closed off so that material is gathered up. The high tensile strength profiled tines are mounted high so that bulk material is handled with ease, the top frame is made with profiles that increase visibility whilst the grab is open. The clean shell of the bucket decreases the risk of material getting stuck or lodged in corners, minimizing contamination between feeds and reducing waste.

All models benefit from a conical bucket bottom for fast emptying.



HOOK SYSTEM: RAIL L

WELDED OR BOLTED TINES



MULTIBENNE XL	190	210	230	250
Weight, kg	615	670	881	932
Width, cm	190	210	230	250
Depth, cm	94.5	94.5	116.5	116.5
Height, cm	65	65	80	80
Volume, m <sup>3</sup>	1.00	1.16	1.74	1.85
Cutting Edge standard, mm	190x20	190x20	250x25	250x25
Number of tines	5/9	6/10	6/9	7/10



## Multibenne™

If you have a diet feeder that has to be loaded with various feeds, Multibenne is your best choice. The closed bottom section and the close spacing of the tines significantly reduces spillage. Multibenne can handle many different types of fodder and manure as well. With this all-rounder you don't need to change implements on your loader as often as before.



WELDED HOOKS




MULTIBENNE™	130	150	170	190	210	230	250
Weight, kg	280	304	360	386	423	447	477
Width, cm	130	150	170	190	210	230	250
Volume, m <sup>3</sup>	0.66	0.76	0.86	0.96	1.07	1.17	1.27
Depth, cm	80	80	80	80	80	80	80
Number of tines in the fork	7	8	9	10	11	12	13

## Powergrab™ XL

**FOR GRABBING OF SILAGE AND OTHER MATERIALS COMBINED WITH SCOOPING**

For the grabbing and handling of Silage fodder for use with 3 – 5 tons lift capacity loaders. Powergrab XL comes standard with a bolt on cutting edge.

The gables have reinforcements that strengthens the attachment of the cutting edge. The internal of the bucket contains a rounded back insert. This creates a sealed hollow section in the rear of the bucket improving torsional stiffness whilst improving the shape for easy ejection of material. The back features a rail system that makes it easy to assemble the hook type required.

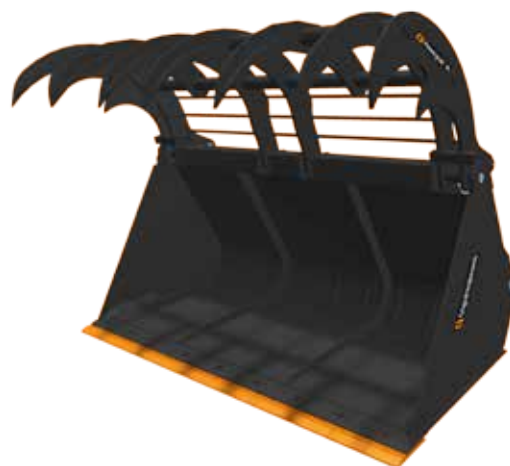


HOOK SYSTEM: RAIL L



POWERGRAB™ XL	220	240	260	280
Weight, kg	1215	1367	1404	1512
Width, cm	220	240	260	280
Volume, m <sup>3</sup>	2.00	2.30	2.40	2.60
Depth, cm	126	126	126	126



 HOOK SYSTEM: RAIL S



## Powergrab™ S

Powergrab is primarily designed for handling silage, but is also suitable for various grabbing and scooping work in agriculture, council and lighter contract work. The conical shape of the Powergrab makes filling and emptying a simple job.




POWERGRAB™ S	185	210	240	260
Weight, kg	540	650	690	780
Width, cm	185	210	240	260
Depth, cm	82	82	82	82
Volume, m <sup>3</sup>	1.0	1.15	1.3	1.4



## Silograb® XL

**GRABBING SOFT MATERIAL ON A LARGER SCALE**

Silograb XL is a versatile silage grab for large front loaders, wheel loaders or telehandlers. The bolt-on hook system makes it suitable for many different machines. Thanks to its design, the material is pressed against the back of the implement when the grab is lowered, keeping the silage in place even when driving over uneven terrain. It is offered with forged tines, easy to change and wear resistant, or profiled hardened steel tines, 40 mm thick with extra wear material on the tip for longer life time.

 HOOK SYSTEM: RAIL L

WELDED OR BOLTED TINES



Bolted



Welded



SILOGRAB XL	FORGED TINES				PROFILE CUT TINES			
	190	210	230	250	190	210	230	250
Weight, kg	560	600	750	800	619	667	851	900
Width, cm	188.6	208.9	229	249.6	188.6	208.9	229	249.6
Depth, cm	120	120	139.5	139.5	120	120	139.5	139.5
Height, cm	104	104	118	118	104	104	111.8	111.8
Volume m <sup>3</sup>	1.0	1.1	1.7	1.9	1.0	1.1	1.7	1.9
Number of tines in the fork	9+10	10+11	9+12	10+13	5+10	6+11	6+12	7+13



## Silograb®


The close spacing of the tines practically eliminates the spilling of silage. The tines are mounted in a box section with welded sleeves. Works well for handling litter and feed.



WELDED HOOKS



SILOGRAB	130	150	170	190	210	230	250
Width, cm	130	150	170	190	210	230	250
Volume, m <sup>3</sup>	0.69	0.79	0.90	1.01	1.11	1.22	1.33
Depth, cm	85	85	85	85	85	85	85
Weight, kg	250	270	300	320	355	377	405
Number of tines in the fork	7+7	8+8	9+9	10+10	11+11	12+12	13+13



Bolted

## Manure Fork XL

**FOR HANDLING OF MANURE AND OTHER SOFT MATERIALS FOR LARGER MACHINES**

Three advantages make a big difference: Our manure forks have a specially manufactured bottom beam with welded sleeves that provides a sturdy fitting of the tines. The tines are fitted before painting the implement – metal touches metal. The tines are tightened to a very high torque. All-in-all this gives you an implement with a long service life.

The Manure Fork XL is a larger heavier design for use with wheel loaders, telehandlers or larger front loaders.



MANUREFORK XL	190	210	230	250
Width, cm	187	209	229	249
Depth, cm	85	85	111	111
Weight, kg	324	353	458	488
Number of teeth	10	11	12	13



## Manure Fork

The standard size Manure Fork is both smaller and lighter than Manure Fork XL and is primarily designed for front loader use.



MANUREFORK	130	150	170	190	230
Width, cm	130	150	170	190	230
Depth, cm	85	85	85	85	85
Weight, kg	123	136	152	65	203
Number of tines	7	8	9	10	12

WELDED HOOKS



HOOK SYSTEM: RAIL L



# BALE HANDLING

Our wide selection of bale handling equipment simplifies your work and makes you more productive.



FRONT LOADERS



WHEEL LOADERS



TELEHANDLERS



YARD LOADERS



SKIDSTEERS





**HOOK SYSTEM: 40X80**



**QUADROGRIP 200**

Total width, cm	235
For bale size, min - max, cm	60 - 200
Arm length, cm	130
Weight, kg	418

## Quadrogrip®

### HANDLES SQUARE BALES IN A PROFESSIONAL WAY

Quadrogrip is the best implement on the market for handling of square and round bales.

The implement arms are mounted on 350 mm wide, extremely stable sliding plates, which move along the main frame. You can lock either the left or the right arm and this will help when stacking.

The sliding runners are serviceable and manufactured in high-quality polyethylene and do not require lubrication. The sliding surfaces are vertical to stop the dirt from sticking. The result is reduced friction, silent movements, minimal wear and longer service life.



**HOOK SYSTEM: 40X80 AND WELDED HOOKS**



**FLEXIGRIP™ 160 200**

For bale sizes, min. max. cm	120-160	150-200
Weight, kg	262	287

## Flexigrip™

### TRANSPORTING AND STACKING ROUND BALES

Flexigrip arms are mounted on heavy duty pins that have replaceable bushings. You can lock either the left or the right implement arm, but there is still some movement and this makes it possible to stack bales tightly without damaging the wrapping round the bale.

The implement arms are also designed in such a way that it is easy to reverse away from the bale and this is an advantage when bales have to be stacked tightly. The uniquely curved and rounded shapes as well as the 90 mm tubes contribute greatly to the very careful handling of both lying and standing bales. Of special note are the long, curved tubes, formed out of one piece, without any sharp edges or welded joints. The upper extension to the tube is a special feature and it gives improved support when handling lying bales. Storing bales upright on top of each other reduces the risk of air and moisture entering the bales, Flexigrip is perfect for the task of stacking upright bales.



**HOOK SYSTEM: 40X80 AND WELDED HOOKS**



**UNIGRIP™ 130 160**

For bale sizes, min. max., cm	90-130	120-160
Weight, kg	200	240

## Unigrip™

### FOR STACKING AND TURNING ROUND BALES

Unigrip has well proven design and a low net weight. It is used for the same tasks as Flexigrip. The choice between these two implements depends on the work routines of the individual user. Unigrip is also well suited for smaller square bales. The implement arms distribute the pressure evenly over a large area and this ensures careful handling of the bales. Unigrip gripping arms are made of large diameter tubes and have no sharp edges or welded joints. This prevents the plastic round the bales from being damaged.





## SELECT THE BEST EQUIPMENT

Our implements for bales are characterised by heavy-duty bearings in the implement arms, large gripping surfaces that distribute the pressure optimally as well as no sharp edges. We accept no compromise – quality must come first.



## Topgrip

### FOR HANDLING ROUND AND SQUARE BALES FROM THE TOP

Topgrip proposes a unique way of handling round or square bales. The arm extends over the bale and clamps the bale towards the back frame to pull the bale away from the stack. The arm falls behind the bale with the weight of the arm instead of hydraulic force. This prevents any damage to the back of the bale.

This is a unique action that is perfect for the customer who re-handles wrapped square or round bales that are stacked closely together. The arm is rounded without welding to reduce any sharp parts that could rip plastic.



HOOK SYSTEM: 80X80



#### TOPGRIP

Max Closed, cm	80
Weight, kg	235



## Flexibal®

### HANDLES BALES FROM THE BOTTOM AND DOUBLES AS PALLET FORK

Flexibal is a strong and very flexible implement. The arms are operated hydraulically, with the rollers rolling under the bale. The steel tubes roll under the bale without damaging it when it is being handled. The generous length and diameter of the tubes distribute the pressure evenly over the bale preventing damage to the plastic wrapping when being handled. The steel tubes are quickly and easily removed when transporting straw or hay bales. When the rollers are removed, Flexibal may also be used for moving pallets (max. 1,000 kg).

Flexibal is offered with either 127mm or 89mm diameter removable rollers to suit our customer different requirements.



HOOK SYSTEM: 40X80 AND WELDED HOOKS




#### FLEXIBAL

	89 MM	127 MM
Bale size max., cm	180	180
Weight, kg	195	195







 HOOK SYSTEM: 40X80



SILOSPPLIT	HD
Width, cm	120
Length, cm	170
Weight, kg	110

## Silosplit®


### SPLITS BALES SWIFTLY

Until now, splitting bales has meant hard work or considerable expense. If you have a loader with double acting lifting cylinders, this problem is solved, thanks to Silosplit.

Silosplit can both transport and split bales. When you have placed the bale where it is to be split, you simply place the blade across the top of the bale and press it down.

Straw and silage bales will easily split in two, simply and smoothly without the complication of additional hydraulics. After that, it is easy to handle the material. Silosplit is supplied with an easy-to-use blade guard that protects the sharp cutting edge.



 HOOK SYSTEM: 40X80



BALE SPIKE	
Width, cm	115
Tine length, cm	125
Weight, kg	60

## Bale Spike MKII

### THE SIMPLE WAY TO HANDLE ROUND BALES

The bale spike is particularly well suited to handle round bales. The longer tine is used to safely transport the bale. The shorter tines stops the bale from rotating.



 WELDED HOOKS



SQUARE BALE FORK - STANDARD	
Width, cm	140
Number of tines, standard	2
Tine length, cm	82 or 125
Weight, kg	78

## Square Bale Fork – Standard

### THE SIMPLE WAY OF HANDLING SQUARE AND ROUND BALES

The Square bale fork is a simple and sturdy implement for both round and square bales. The tines in the lower box section can be installed 80 or 130 cm apart or one in the center section for improved capacity. The Square Bale Fork may be supplied with a U-shaped back extension that supports the top bale as an optional extra.

The back extension is a safety device that we strongly recommend especially if the loader is non self levelling or the tractor is without cab.



# A PERFECT IMPLEMENT FOR MANAGING SQUARE BALES




## Square Bale Fork – Safety

### THE SAFER WAY OF HANDLING SQUARE BALES

The lower box section of the Square bale fork is hinged and this is an important safety detail. Firstly you can lock the tines in the upright position, increasing safety when driving, particularly on public roads. Secondly, the handling of bales is more effective and safe. When unloading, the bales are pushed into place using the main frame. If unloading takes place at full height, the top bale is pushed into place using the upper section of the implement and without pressing the long tines into the bale. Therefore there is reduced risk of the bale falling back out when you reverse.

The Square bale fork can be supplied with two different bottom frames. The 190 cm wide frame is suitable for long large bales. The 140 cm frame is supplied with two tines as standard, but this may be increased to a total of five tines if required.

The Square bale fork can be supplied with back extension (for handling several bales simultaneously) or with a bag hook (for lifting big bags) as optional equipment. (Maximum load on the bag hook is 750 – 1250 kg depending on height setting of the lift arm).

 HOOK SYSTEM: 40X80



SQUAREBALEFORK – SAFETY	140	190
Width, cm	140	190
Number of tines, standard	2	5
Tine length, cm	82/125	82/125
Weight, kg	133	168

# BUCKETS

Buckets with high versatility and unbeatable durability for efficient work.



FRONT LOADERS



WHEEL LOADERS



TELEHANDLERS




YARD LOADERS



SKIDSTEERS

# BUCKETS FOR ALL NEEDS

All buckets are conical and easy to fill, so that the material does not have to be forced into the bucket. The conical design also allows for rapid and complete emptying of the bucket. Whatever your needs are, you will be able to find your new bucket in our wide range.

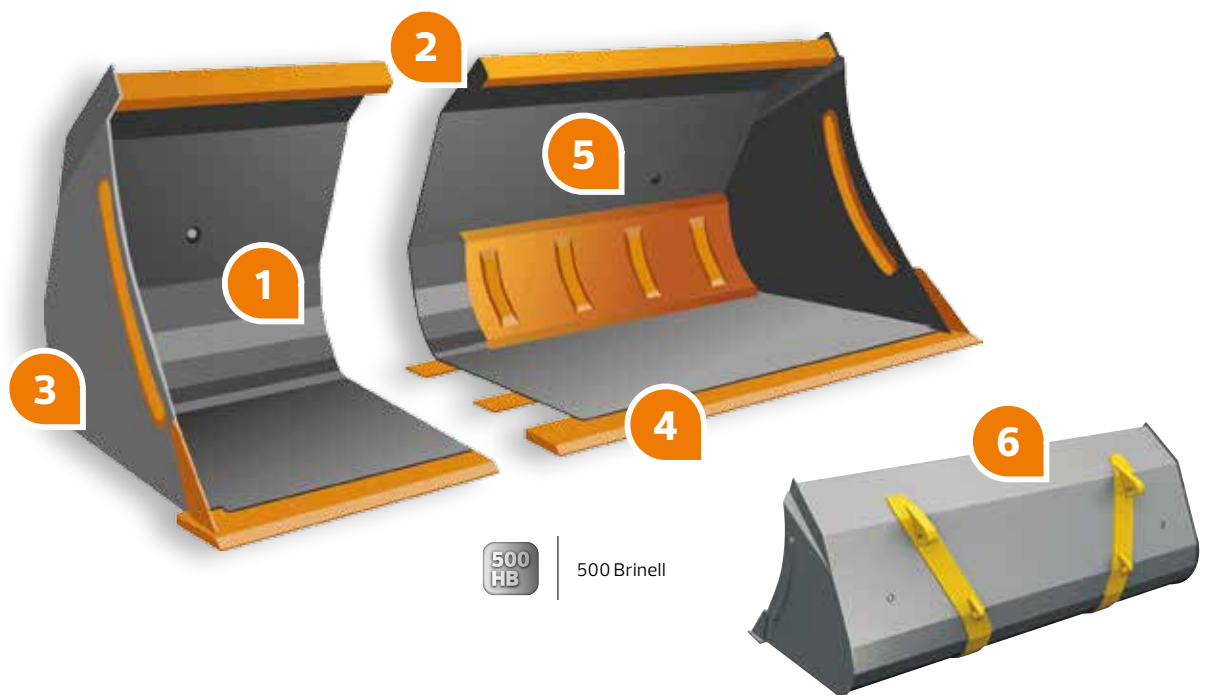

- 1.** The buckets have a rounded bottom and conical shape. Numerous small folds make for a durable bucket and the conical design allows for simple filling and complete emptying.
- 2.** The upper edge of the bucket back ends with a U-beam. On the HD and HDV buckets this area has an additional angle profile welded all along the width of the bucket.
- 3.** The sides have reinforcements that make them even stronger. At the very bottom there is welded a triangular wear-piece, which simultaneously stabilises the cutting edge. On the HD buckets, this wear-piece runs all the way up along the side.

- 4.** All buckets have extremely durable cutting edges (500 Brinell). Depending on bucket model and size, 12, 16 or 20 mm thick and 100, 150 or 200 mm wide cutting edges are used. Together with the parallel wear-pieces this makes the bucket bottom strong, resist torsion and hardwearing.
- 5.** In order to have even greater torsional strength and stability, the wider buckets are fitted with an additional, profiled back-plate (not on L and LV models). Using a special overlap design, the HV buckets have a hole profile along the implement hooks and this makes these large buckets stronger and more stable.
- 6.** The implement hooks contribute to the strong design. You will notice that hooks and locking holes are positioned along a fold in the metal. Depending on bucket model and size, there may be a double profile sheet inside the bucket.

# THE RIGHT BUCKET – EVERYTIME

● BEST CHOICE ○ GOOD CHOICE

FIELDS OF APPLICATION	XV	HDXL	HDX	HDV	HD	HXV	HV	H	HT	LV	L	CE
Lighter digging and loading			●								●	●
Loading of grain, wood chips and snow	●		●	●		●	●			●		
Loading of lighter material in larger volumes	●		●			●						
Loading of material higher up												
Heavy digging and loading		●		○	●	●	●	○	●			
Work in gravel, sand, earth and stones		●		●	●	●	●	●	○			
Grading												
Professional snow clearing	●		●	●		●	●					

FIELDS OF APPLICATION	MPB	MPU	XH	SC230	GRADING BUCKET XL	GRADING BUCKET	PRECISION BUCKET
Lighter digging and loading							
Loading of grain, wood chips and snow			●	●			
Loading of lighter material in larger volumes			●				●
Loading of material higher up			●				
Heavy digging and loading	●	○			○	○	
Work in gravel, sand, earth and stones	●	○			○	○	●
Grading	●				●	●	○
Professional snow clearing				●	●	○	

BUCKETS





## XV


### A LARGER BUCKET FOR LIGHT MATERIALS


To widen the range of buckets we have developed a new larger volume bucket for use with heavier machines.

The Volume Bucket XV is designed with light weight material in focus which gives a higher load capacity. The bucket has been reinforced in areas with higher stress, is despite its size quite light.



Available with cover plates.

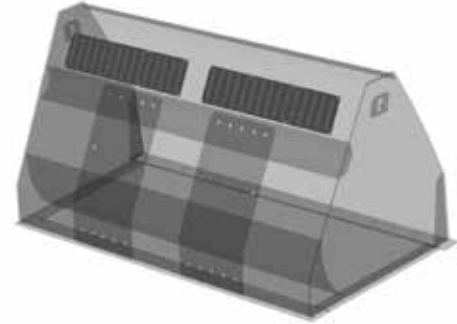

 HOOK SYSTEM: M24

 500 HB

XV	240	260	280	300
Width, cm	251	268	291	314
Depth, cm	136	136	156	171
Height, cm	124	124	132	147
Volume (heaped), m <sup>3</sup>	3.0	3.2	4.0	5.0
Cutting edge WxT, mm	250/25	250/25	250/25	250/25
Weight, kg	657	705	1065	1313

**OPTIONS:** Cutting edge\*




## HDXL

### A LARGER BUCKET FOR HEAVY MATERIALS

The Soil Bucket HDXL is developed and designed to handle heavy material.

The thicker steel plates and reinforcements makes this bucket an excellent choice for moving dirt, soil, and gravel. Since the bucket is sturdier than its sibling, the Volume Bucket XV, it can endure more strain. The Soil Bucket HDXL is a versatile implement for a larger wheel loader or a telehandler.



 KROGSYSTEM: M24

 500 HB

HDXL	220	240	260	270	290
Width, cm	224	244	269	280	300
Depth, cm	94	94	105	120	120
Height, cm	112	112	123	133	133
Volume (heaped), m <sup>3</sup>	1.3	1.4	2.0	2.5	2.7
Cutting edge WxT, mm	250/25	250/25	250/25	250/25	250/25
Weight, kg	603	637	744	1116	1173

**OPTIONS:** Cutting edge\*

### BoH M24 system for the larger implements – HDXL and XV

We offer a flexible solution where we are able to fit the hooks before shipping, and our hook system also gives the customer the benefit of being able to switch hooks later on, if they for example switch machines. The hook system has gone through extensive testing and has proven to be very durable and reliable.

Some examples of hooks:





## HDX

### A LARGER BUCKET FOR LIGHT MATERIALS

The HDX range is offered in a popular size range that is designed to handle light to moderately dense material. The light weight design has many innovative design features that give the bucket strength in areas of possible high stress. Reinforcements including internal side gussets give support to the cutting edge and a wide enclosed top hat support the bucket during break out. All of these features support the bucket and mean that the side plates of the bucket can be thinner than the comparable bucket on the market. This lowers the weight of the bucket and therefore increases the capacity of bucket, efficiency and work output. Also, the conical shape allows for simple filling and complete and easy emptying.



WELDED HOOKS



500 HB

HDX	10.21	14.21	19.21	11.23	15.23	20.23	12.24	16.24	21.24
Width, cm	213	213	213	229	229	229	244	244	244
Depth, cm	103	121	141	103	121	141	103	121	141
Height, cm	79	90	105	79	90	105	79	90	105
Volume (heaped) m <sup>3</sup>	1.05	1.40	1.90	1.13	1.50	2.00	1.20	1.60	2.10
Cutting edge WxT, mm	150/16	150/16	150/16	150/16	150/16	150/16	150/16	150/16	150/16
Weight, kg	362	411	517	379	430	542	396	448	565

OPTIONS: Cutting edge\*

### Bolt on cutting edge, BCE

The welded cutting edge is pre-drilled for a bolt on cutting edge. Three part numbers are available and mount to 2.1m, 2.3m & 2.4 widths.

Each BCE kit is made up of three component parts and can be turned around and reused when worn. Manufactured from 500HB hardened steel.

BUCKETS



## HDV

### OUR HEAVY DUTY BUCKET WITH INCREASED VOLUME

These volume buckets are designed for professional users with larger tractors that use them a lot and/or lift heavy weights and who therefore have severe requirements for ruggedness and durability. The obviously sturdy design is noticeable in the steel plates that are 20% thicker compared to our HV Bucket. This Heavy Duty Volume version is available in three sizes of 2.10, 2.40 and 2.60 meters.



WELDED HOOKS



500 HB

HDV	210	240	260
Width, cm	210	240	260
Depth, cm	104	109	109
Height, cm	85	98	98
Volume (heaped), m <sup>3</sup>	1.50	1.70	1.85
Cutting edge WxT, mm	200/20	200/20	200/20
Weight, kg	416	434	471





## HD

### OUR HEAVY DUTY BUCKET

Contractors bucket. This is the sturdiest bucket in our range together with our HDV buckets. This bucket is based on the H bucket. On the 210, 240 and 260 versions the steel is 20% thicker. Also, the HD buckets have thicker cutting edges, wider and longer bottom reinforcements, an extra angle reinforcement inside the bucket next to the implement hooks as well as an angled wear-plate at the back of the bucket.



 WELDED HOOKS



500 HB

HD	185	210	240	260
Width, cm	185	210	240	260
Depth, cm	81	81	86	86
Height, cm	75	75	75	75
Volume (heaped), m <sup>3</sup>	0.72	0.82	0.95	1.03
Cutting edge WxT, mm	150x20	150x20	200x20	200x20
Weight, kg	227	314	340	365



## HXV

### EXTRA VOLUME VERSION OF OUR HV BUCKET

This new extension to the heavy materials line up is aimed at the user that feels that our HV-bucket is a good bucket, just a little bit too small. The bucket is still as sturdy as its slightly smaller sibling. We have increased the volume of the bucket by extending the gable plates making them convex instead of straight as on the HV-bucket. This gives an extra volume of between 15-45% depending on the size of the bucket. The HXV bucket is only available with welded Euro hooks.



 WELDED HOOKS




500 HB

HXV	180	200	220	240	260
Width, cm	180	200	220	240	260
Depth, cm	104	104	104	109	109
Height, cm	98	98	98	98	98
Volume (heaped), m <sup>3</sup>	1.45	1.6	1.7	2	2.2
Cutting edge WxT, mm	150/16	150/16	150/16	200/20	200/20
Weight, kg	320	345	370	424	450

## WE'VE GOT SPARE PARTS CLOSE BY EVEN WHEN YOU'RE FAR AWAY

Spare parts are available for everything from the biggest to the tiniest detail on the implement, and we've got them close by. Our world-leading distribution network guarantees proximity to you, no matter where you are.

All you need to do is contact your local dealer.

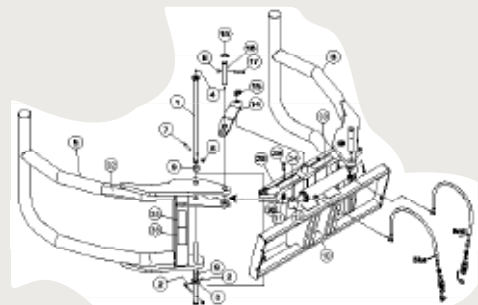

Original Parts by Alo





BUCKETS



## HV

### THE INCREASED VOLUME VERSION OF THE H BUCKET

A sturdy material and snow bucket. This bucket is aimed at users that need to move large volumes. The generous volume is achieved by designing the bucket deeper and taller. All models have a double profile in the bottom as well as beside the implement hooks. That means that there is extra strength where the stress is the greatest.



WELDED HOOKS



HV	200	220	240	260
Width, cm	200	220	240	260
Depth, cm	104	104	109	109
Height, cm	85	85	98	98
Volume (heaped), m <sup>3</sup>	1.16	1.28	1.70	1.85
Cutting edge WxT, mm	150/16	150/16	200/20	200/20
Weight, kg	273	294	415	443



## H

### OUR STANDARD BUCKET FOR A WIDE RANGE OF MATERIALS

The soil bucket – the most popular in our range – can do anything. The short bucket bottom makes the bucket strong and well suited to heavier tasks. The three larger buckets have an extra rounded profile back plate across its full width.



WELDED HOOKS



H	135	160	185	210	240
Width, cm	135	160	185	210	240
Depth, cm	81	81	81	81	81
Height, cm	75	75	75	75	75
Volume (heaped), m <sup>3</sup>	0.54	0.65	0.72	0.82	0.95
Cutting edge WxT, mm	150/16	150/16	150/16	150/16	150/20
Weight, kg	147	166	205	252	294



## HT

### THE H BUCKET WITH TEETH

Very strong, stable and effective bucket for efficient handling of soil, gravel, stones, etc. The hardened teeth provide the same efficient and consistent productivity even when handling coarse materials such as large soil clods and rocks.



WELDED HOOKS



HT	135	160	185	210
Width, cm	135	160	185	210
Depth, cm	81	81	81	81
Height, cm	75	75	75	75
Volume (heaped), m <sup>3</sup>	0.54	0.65	0.72	0.82
Cutting edge WxT, mm	150/16	150/16	150/16	150/16
Weight, kg	152	172	211	259





## LV

### THE LARGER VERSION OF THE L BUCKET

A bucket for light materials. This series of buckets is suitable for handling grains, grass seeds, wood chips and other materials with low density. The buckets have two vertical reinforcements next to the implement hooks.



WELDED HOOKS

500 HB

LV BUCKET	200	220
Width, cm	200	220
Depth, cm	100	100
Height, cm	85	85
Volume (heaped), m <sup>3</sup>	1.13	1.25
Cutting edge WxT, mm	100/16	100/16
Weight, kg	221	239



## L

### OUR STANDARD BUCKET FOR LIGHTER MATERIALS

A light bucket. The L bucket is an excellent choice if you only need it for light duties. This means that the price is extremely competitive.



WELDED HOOKS

500 HB

L	130	180
Width, cm	130	180
Depth, cm	80	80
Height, cm	75	75
Volume (heaped), m <sup>3</sup>	0.51	0.71
Cutting edge WxT, mm	100x12	100x12
Weight, kg	123	163



## CE

### THE C BUCKET WITH EURO HOOK SYSTEM

Compact Utility Bucket Specially designed for Compact material handlers with Euro hook system only. The bended gable plates add strength into the sides of the bucket as well as of adding faster emptying cycles.



WELDED HOOKS

500 HB

CE	130	150	170
Width, cm	134	154	174
Depth, cm	73	73	73
Height, cm	62	73	73
Volume (heaped), m <sup>3</sup>	0,34	0,39	0,44
Weight, kg	98.5	109.2	120.2

# SPECIAL BUCKETS



## Multi Purpose Bucket

**THE VERSATILE AND ROBUST TOOL FOR MATERIAL HANDLING**

This is yet another example of our customer-driven innovation. This multipurpose bucket gives unbeatable versatility and can easily switch between:

- Load and carry like a normal bucket.
- Bottom emptying, with improved emptying height.
- Open bucket and excavate using blade.
- Grab.
- Sanding and grading via bottom opening.

This makes the Multi Purpose Bucket very usable for farmers, local authorities and others who require efficient tools with maximum flexibility.

Both the bottom and back of the bucket are made in a box design, which gives it a torsionally rigid and robust construction. The bucket has three hardened cutting edges: one at the leading edge of the bucket, one at the back edge and one in the digger blade's lower section. The sides have additional strengthening in the lower section where there is maximum wear. They are also fitted with toothed interiors for maximum grip. If you want to get the highest possible work capacity from your bucket, then the Multi-Purpose Bucket is the obvious choice.

All models are available with Euro or Skid Steer hooks.



## Multi Purpose Bucket Utility

The Utility version of our Multi Purpose Bucket is a more basic one. While it doesn't have the cutting edge and isn't as deep as the Multi Purpose Bucket it will still meet your requirements for a versatile implement.



MP/MPT BUCKET	160	185	210
Width, cm	160	185	210
Depth, cm	70/76	70/76	70/76
Height, cm	69	69	69
Volume (heaped), m <sup>3</sup>	0.48	0.56	0.66
Cutting edge WxT, mm	150/16	150/16	150/16
Weight, kg	367/373	401/407	434/441

MP/MPT BUCKET UTILITY	160	185	210
Width, cm	160	185	210
Depth, cm	54	54	54
Height, cm	79	79	79
Volume (heaped), m <sup>3</sup>	0.40	0.47	0.53
Weight, kg	264	291	318




## XH High Tip Bucket

**ALLOWS TIPPING AT A HIGHER LEVEL**




The new High Tip Bucket is designed to increase functionality by introducing a larger range that is designed to encompass your specific requirements. The bucket increases lift heights and a high tipping angles to empty the bucket quickly, small cycle times show increase efficiency and improve productivity. High tip buckets are used for handling high volume materials high up, for example loading grains, grass seed, beets or wood chips.



 **HOOK SYSTEM: 40X80**



XH HIGH TIP BUCKET	180	200	220	240	260
Width, cm	181	201	221	241	261
Depth, cm	150	150	150	150	150
Height, cm	107	107	107	107	107
Volume (heaped), m3	1.40	1.60	1.80	2.00	2.20
Cutting edge WxT, mm	180x16	180x16	180x16	180x16	180x16
Weight, kg	519	553	587	622	656

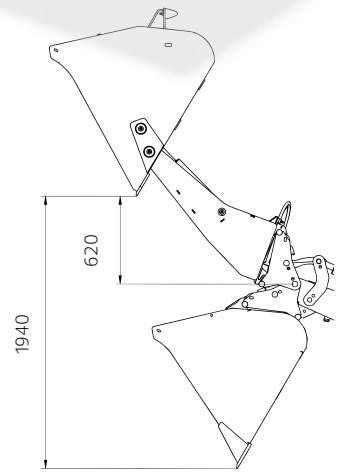

**SPECIAL BUCKETS**



PC: Cone shaped  
PS: Straight



## Precision Bucket

**ALLOWS PIN POINT ACCURACY**

Precision Buckets are designed for greater control of the emptying of material from the bucket. The long bottom part of the bucket creates friction that slows the emptying and that gives the operator much more precision. There are two versions offered; straight bucket with parallel side gables and a conical bucket that has a narrower front for even greater precision. Both version benefit from Alö's notorious conical bucket back for a clean and complete emptying of material. The front loader version with Euro or SMS hooks has a depth of 2 meters because of limitations in the loading capacity.

A wheel loader version is available with Big BM hooks with a depth of 2.5 meters and has much higher capacity to maximise the capability of larger wheel loaders.



 **WELDED HOOKS**



PRECISION BUCKET	200PC	200PS	250PC	250PS
Width, cm	54	116	87	116
Depth, cm	209	209	269	269
Height, cm	71	71	93	93
Capacity (struck), m <sup>3</sup>	0.71	0.87	1.40	1.55
Weight, kg	271	302	566	577



## Grading Bucket XL

**WHEN GRADING AND LEVELLING, THIS IS THE PROFESSIONAL'S CHOICE**

The Grading Bucket XL is a heavy duty bucket where the low back plate gives the operator full view of the tip of the bucket. This makes it easy to see what is going on and simplifies grading jobs. Grading buckets are an intermediary between a normal bucket and a blade so if you are improving a driveway, levelling a yard, or something similar, this is your new best friend. Fits a wheel loader as well as a front loader.




500 HB

GRADINGBUCKET XL	220	240	260	280	300
Width, cm	225	245	265	285	305
Depth, cm	133	133	158	158	168
Height, cm	62	62	63	63	63
Volume (heaped), m <sup>3</sup>	0.79	0.87	1.14	1.23	1.40
Cutting edge WxT, mm	200/20	200/20	200/25	200/25	250/30
Weight, kg	646	683	900	945	1151



## Grading Bucket

The standard size heavy-duty grading bucket is both smaller and lighter than the XL model. It is aimed at the user with more basic needs.



500 HB

GRADINGBUCKET	180	200	220	240
Width, cm	185	205	225	245
Depth, cm	118	118	118	118
Height, cm	53	53	53	53
Volume (heaped), m <sup>3</sup>	0.62	0.70	0.78	0.86
Cutting edge WxT, mm	150/20	150/20	150/20	200/20
Weight, kg	286	312	337	407

# Special Clearing Bucket


**THE PROFESSIONAL TOOL FOR CLEARING SNOW AND OTHER LIGHT MATERIAL**


An implement which really does increase the utility value of the tractor and makes the most of its capacity – The 230SC PRO Special Clearing Bucket ticks these boxes. With this implement you can clear areas covered with snow effectively, and also other tasks such as clearing poultry manure.

High performance is key! Fully extendable flaps folding to 90 degrees turns the bucket into a full 365 cm-wide snow blade. As an addition, an effective ice-cutting edge is also available as an option. When you angle the flaps forwards, you can "carve" the snow into the bucket or fold the flaps the other way to plow.

The hydraulics are adapted for Ålb's unique LCS control system with its 3rd and 4th functions. Cut outs in the back for improved visibility and accumulators for shock impact are included as standard. The cutting edges are spring loaded which means that the bucket can be tilted forwards without having to take pressure off the flaps. There are alternative cutting edges including plastic and replaceable steel straight cutting edges depending on the requirement.

A new bolt on hook version gives flexibility to alternative hook systems so that now we can offer the Special Clearing Bucket to other machines that makes the most of their capacity.

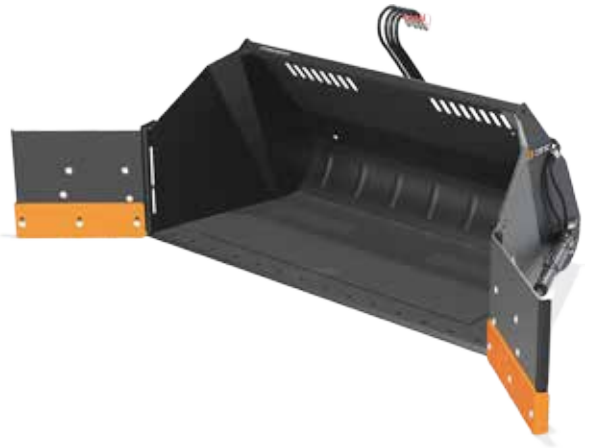

 HOOK SYSTEM: RAIL S AND WELDED HOOKS



SPECIAL CLEARING BUCKET	230
Height, cm	102
Height inside, cm	98
Depth min, cm	118
Depth max, cm	175
Depth inside, cm	109
Width min, cm	230
Width max, cm	365
Flap movement	148°
Flap height, cm	61
Flap width, cm	69
Capacity struck*, m <sup>3</sup>	1.14
Capacity heaped*, m <sup>3</sup>	1.41
Weight cpl, kg	605



**SPECIAL BUCKETS**



**THE RIGHT IMPLEMENT FOR ANY TASK**

www.quicke.nu





ARION

CLAAS

CLAAS

VIC

HEIDY-8015  
L 2011  
GL-140-6-T2

EUR



# LIFTING IMPLEMENTS

Overcome your challenges with our lifting implements for maximum productivity and comfort.



FRONT LOADERS



WHEEL LOADERS



TELEHANDLERS



YARD LOADERS



SKIDSTEERS




# Pallet Fork XL

## FOR HEAVY DUTY PALLET HANDLING

Move palletized, bagged or bulky material quickly and easily with the Pallet Fork XL. Manually adjustable forks load and unload, lift and carry, move and place materials around a variety of jobsites. Save time and labour costs by lifting, carrying, and moving with the Quicke Pallet Fork XL.

The Pallet Fork XL is suited for industrial plant and landscaping work, construction sites, farm chores and fertilizer handling. The generous lift capacity makes it perfect for material handling with telehandlers and wheel loaders.



PALLET FORK XL	3.500	5.000	8.000
Width, cm	120/150	120/150	200
Fork length, cm	122/150/180	122/150/180/200	122/150/180/200
Fork height, cm	65.5	65.5	84.4
Iso Norm FEM	3A	3A	4A
Weight frame * kg	104-133/123-151	104-133/123-151	256-266
Weight fork (pair) kg	146/170/198	192/226/260 /284	272/316/362/392



# Pallet Forks

The upper support of the backframe is made in one piece for optimum strength. The beam has recesses for width adjustment and provides secure positioning of the forks. The load is distributed over a large area thanks to the wide load-bearing surfaces of the forks. This also ensures a stable fork that never tilts or wobbles.



PALLET FORKS	1.000	1.600	2.500
Width, cm	140	140	140
Max. load, kg	1000	1600	2500
Fork length, cm	97/122	97/122	122
Fork height, cm	94	94	94
Fork type	Forged	Forged	Forged
Weight, kg	155/163	175/187	217



## WE'VE GOT SPARE PARTS CLOSE BY EVEN WHEN YOU'RE FAR AWAY

Spare parts are available for everything from the biggest to the tiniest detail on the implement, and we've got them close by. Our world-leading distribution network guarantees proximity to you, no matter where you are.

All you need to do is contact your local dealer.

**Original Parts** by Alo



## Hydraulic Pallet Fork

### A MORE FLEXIBLE PALLET FORK

Our high quality hydraulic pallet forks are, in brief, more productive, comfortable and ergonomic. The pallet forks can be purchased either as a complete product in a number of sizes or in an easily retrofitted kit. This solution allows a perfect line of sight from the driver's cab to precisely position the required distance between the fork tines. The retrofit kit is suitable for all our ISO pallet fork frames manufactured since December 2012.



HYDRAULIC PALLET FORK	1600	2500
Width, cm	146	146
Fork length, cm	97/122	122
Fork height, cm	94	94
Max load, kg	1.600	2.500
Fork type	forged	forged
Weight, kg	249/261	291

HYDRAULIC FORK - RETROFIT KIT	
Weight, kg	74
Weight - fitted, kg	249-291



## Log Grab Attachment

### TURNS YOUR PALLET FORK INTO A GRIPPING TOOL

#### Accessories – pallet forks

Suitable for our pallet forks manufactured after December 2012.

Cannot be combined with the hydraulic pallet fork.



#### LOG GRAB ATTACHMENT

Weight, kg 85



## Bale Spike Attachment

### TURNS YOUR PALLET FORK INTO A BALE HANDLER

#### Accessories – pallet forks


Bale spike (one short and one long tine). For attachment to pallet fork frame. Suitable for our palletforks manufactured after December 2012.

Cannot be combined with the hydraulic pallet fork.



#### BALE SPIKE ATTACHMENT

Width, cm 115  
Tine length, cm 125  
Weight, kg 60

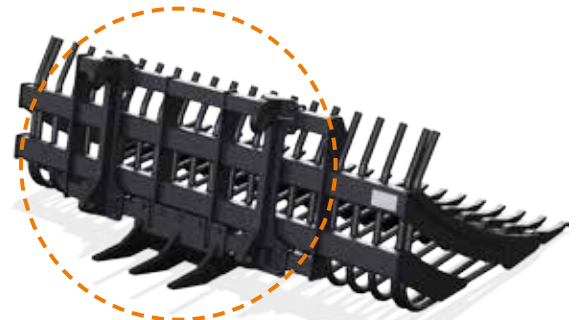


The prying bar add-on enables you to unearth difficult stones, by angling the implement and prying them loose.

## Stone Fork XL

**PICK UP, CLEAN AND TRANSPORT STONES**

Our range of Stone Forks consists of three sizes of front loader models and three sizes of wheel loader models. The distinctive design provides considerable potential to fill the implement without dropping any of the stones already in the bucket. Mounted at the front end are hardened tines which point slightly downwards.




 HOOK SYSTEM: 80X80 XL AND WELDED HOOKS

STONE FORK XL	230	250	280
Width, cm	231	250	280
Depth, cm	160	160	160
Height, cm	80.5	80.5	80.5
Number of bottom tines	20	22	24
Weight, kg	805	876	942

## Stone Fork

The standard size Stone Fork is smaller and lighter than Stone Fork XL and is intended for front loader use.



 HOOK SYSTEM: 60X80 WITH THREAD PLATE AND WELDED HOOKS

STONE FORK	150	200	230
Width, cm	156	200	222
Depth, cm	111	111	111
Height, cm	85.1	85.1	85.1
Number of bottom tines	15	19	21
Weight, kg	242	318	348



# SAFE HANDLING



## Big Bag Lifter

**FOR SECURE HANDLING OF BIG BAGS**


The new range of bag lifters offers a model size for all big bag handling scenarios.

There are three different models; Single, Dual and Triple.

Single, capable of lifting 1000kgs features a new back frame that is designed to accommodate several alternative bolted hook assortments. Bolted hooks add flexibility in the future if a change in material handler is chosen. The hook is slightly pointed to the left to enable uses with Telehandlers who sit to the left to see the hook clearer whilst connecting the hoops.

Dual & Triple models, capable of lifting two or three bags at once have the extra capacity of 1500kgs, along with the ability of extending the arm for higher bags to 51cm in 17 cm increments. The arms are set with 85 cm distance which is the perfect distance for safe transportation of the bags. The back frame on dual and triple Big Bag Lifter uses an 80x80 bolt on hook interface that is sturdy for wheel loaders and large Telehandlers.



 HOOK SYSTEMS: 40X80, 80X80



BIG BAG LIFTER	SINGLE	DUAL	TRIPLE
Weight, kg	79	177	269
Max Load (each arm), kg	1000	1500	1500
Width, cm	127	213	278
Min height, cm	164	168	168
Max height, cm	164	221	221

LIFTING IMPLEMENTS



## 3-point Linkage

**SIMPLIFY YOUR WORK WHILE MOVING IMPLEMENTS AROUND THE FARM**

This implement can be used on the tractor's 3-point linkage to help move implements around the farm. Available with either Euro or SMS hooks.



### 3-POINT LINKAGE

Weight, kg 78



## Counter-weight

**IMPROVE THE STABILITY OF YOUR TRACTOR**

The counter-weight improves the stability of the tractor/loader unit. Connection and disconnection is simply done using the attached coupling shaft.

The counter-weight helps to:

- improve stability and the distribution of weight
- lower the loads on front wheels and axle
- improve ground contact, which in turn improves traction



### COUNTER-WEIGHT WEIGHT, EMPTY WEIGHT, FILLED (not factory filled)

186 kg	800 kg with concrete
212 kg	1000-1200 kg with concrete

# ACCESSORIES

Accessories that will help to improve your tractor.



Q-Bloq 600 kg Add-on



Q-Bloq 1800 kg



Q-Bloq 900 kg



Q-Bloq 600 kg



## Q-Bloq

### IMPROVE THE STABILITY OF YOUR TRACTOR

The all new Q-Bloq counter-weight is a solid cast weight that is possible to fit to both the rear and front hitch of tractors with either Category 2 or 3 linkages.

The Q-Bloq helps to:

- improve stability and the distribution of weight
- lower the loads on front wheels and axle
- improve ground contact, which in turn improves traction

The benefit above the previous counterweight is the advantage to be able to add more weight simply by driving into an add-on weight. The Add-on weight is secured by a locking bolt.

The counterweight is an extremely useful piece of equipment to properly ballast your machine to maintain weight on the tractor's rear axle. The counterweight increases the stability for the tractor-loader unit. The range of counterweights consists of three base weights of 600 kg, 900 kg or 1800 kg. An add-on weight of 600 kg can be mounted on all base weights to increase the total ballast weight. The combinations of weights will cover the range from 600 kg to 2400 kg (600 – 900 – 1200 – 1500 – 1800 – 2400).

Q-BLOQ	600	900	1800	600 ADDON
Weight, kg	600	900	1800	600



## THE SUPPORT

As an Original Implement owner, you can expect world-leading level of reliability and service. Your purchase does not end our commitment to you – it's only the beginning.

Your Implement has to perform at its best for a long time. We have built up a strong global organisation with a comprehensive service network, giving you easy and fast access to locations for service, spare parts and knowledgeable support – wherever you operate in the world.

You can be sure that our service and support meets the same standard as our products – always aiming for 100 percent customer satisfaction. To us, second best is not enough.

**Absolute customer focus.** In order to support you as a customer, we have created routines that ensure all the departments in our organisation are focused on your requirements.

**Quick online help.** You'll have round-the-clock online access to spare part details, instructions and other important information.

**Tight-knit spare part network.** Spare parts are available from our subsidiaries as well as from larger Original Implement representatives the world over.

**Proximity.** Our world-leading distribution network guarantees proximity to you, no matter where you are. Global technical support. As an Original Implement customer, you always have access to prompt technical support. All over the world, our representatives can provide knowledgeable and high-quality service.



**Constant follow-up.** Your viewpoints and suggestions for improvement are gathered together and centrally processed. This follow-up functions as a valuable basis for us when developing implements. The development of Original Implement is the result of close cooperation with users all over the world.



# HOOK SYSTEMS

Bolt on solutions for maximum flexibility



# A VARIETY OF HOOK SYSTEMS FOR A VARIETY OF LOADERS

Our implements can be used with a variety of hooks to attach them to different loading machines. The angle of the back of the implement and the working geometry of the loader influence the design of the hooks. We use the following systems:

- 40x80 / 80x80: With U-bolts mounted at the back of the implement.
- 80x80 XL: With U-bolts mounted at the back of the implement.
- Rail S & L: The implement has a rail section at the back plane on which the hooks are bolted.
- BoH M24: The hooks are welded on plates that are bolted to the back of the implement with 9 or 10 M24 bolts. These are used on the XL bucket range.
- Welded hooks.

## Hook systems for any machine

When it comes to hooks and hook systems we have four main hook systems besides welding hooks to the implement. Depending on the design of the back of the implements there are different ways of fixing the hooks to the back. We have 40x80/80x80 mm beams where the hooks are bolted with U-bolts on a frame on the back of the implement. There is also larger version for the bigger implements called 80x80 XL. Furthermore, there is the Rail S and Rail L where the hooks are bolted to a rail and finally the new system BoH M24 where the hooks are bolted directly on to the back of our largest buckets.



### 40x80/80x80



- Bale Spike MKII
- Big Bag Lifter
- Flexibal
- Flexigrip
- Quadrogrip
- Silocut SG MKII
- Silosplit
- Square Bale Fork - Safety
- Stone Fork
- Stone Fork XL
- Topgrip
- Unigrip
- XH Bucket

### RAIL S/RAIL L



- 230 SC Bucket
- Silocut XL
- Manure Fork XL
- Multibenne XL
- Powergrab S
- Powergrab XL
- Silograb XL

### 80x80 XL



- SilocutXL



### FRONT LOADERS

- Euro
- MX
- SMS
- TYP3
- Skidsteer

### YARD LOADERS/WHEEL LOADERS/TELEHANDLERS

- Weidemann
- JCB Q-FIT/TC
- Claas Scorpion
- Zettelmeyer 402/602
- Manitou
- Merlo ZM2,ZM3
- Schäffer
- Kramer
- Giant
- CNH LM
- Bobcat/FDI/MF
- Volvo BM/Small
- Valtra Small
- JLG/Deutz Fahr
- Dieci L-M-S
- Atlas
- Cat
- Liebherr
- ... and many more.



**Quicke**

# Original Implements™



**Ålö AB**  
Brännland 300, SE-901 37 Umeå, Sweden  
Tel: +46 (0)90 17 05 00  
info@alo.se  
www.alo.se

CLIMATE  
COMPENSATED  
PAPER



Some front loaders in this brochure are fitted with extra equipment. Certain products may be optional extra equipment. Some of the products are not available on all markets. Product specifications and performance data stated can vary depending on the tractor model. Working with front loaders and accompanying implements is not without risk. Serious injuries to people and damage to materials can occur in the event of incorrectly carried out work. Show consideration to your surroundings, use common sense and comply with local laws and regulations. Always read carefully through the instruction manual supplied. Only use original spare parts and accessories. Ålö's product range is continually being developed. We reserve the right at any time to alter specifications, prices and versions with no obligation on our part. ©, ™ Trademarks of Ålö AB.